

MAKINGTEC®

Laser measuring equipment

Laser level equipment

Measuring tapes

Accessories



MAKING HOUSE INTO HOME

把房子变成家



YongKang Making Industry and Trade Co., LTD

No.12, Baijiale Road, XiaLiXi Industry Area, Yongkang, Zhejiang, P.R.CHINA

Tel: +86-579-87387696

Fax: +86-579-87385729

Post Code: 321300


Cell: +86-15325790079

+86-18605895397

E-mail: mk@kindustry.cn

Http:// www.kindustry.cn

MAKINGTEC® **Gaojiu®** **ZENYITOOLS**

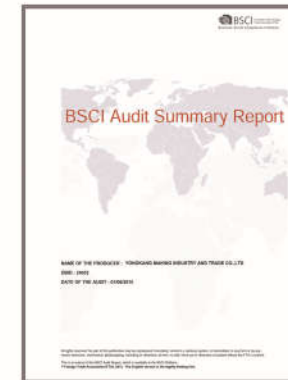

BSCI



EN60825



CE



EMC



ROSH



Design patent

MAKINGTEC Company produces professional equipment that is designed and produced laser products. It helps to use experience advantages and resources from all over the world to provide customers with up to date equipment.

Our Positioning

We are focus on Laser distance meter, laser level, hand mixer, drywall sander ect construction tools.

Our Factory

MAKINGTEC local in YONGKANG city which famous as Hardware Products. We have 300 employees, include 60 engineers and we have 15000 square meters of our production site.

Our Service

All inquire will reply in 12hours. We offer a range of products and friendly services including sale and shipping and answer any professional questions about the products.

Our Quality

All of our products have CE, RoHS, EN60825 by TUV, and the test result is VERY GOOD for FFu.

MAKINGTEC®

LASER DISTANCE METER

K series.....	6
M series	7
X series.....	8
D series.....	9
W series	10
H series.....	11

LASER LEVEL

Square laser level DX-02.....	12
Cross laser level SA-02L.....	13
Cross laser level SA-02C	14
Cross laser level SA-02C SET.....	15
Laser level 02/03/05	16
Laser level 02G/03G/05G	17
3D 12line cross laser level	18

Accessory

Parts.....	19
------------	----

LASER DISTANCE METER

K-40 (40M)
K-60 (60M)

New

- Area
- Volume
- Pythagorean
- Double Injection Mould
- 2 Datum Position
- Fast Read of distance
- Soft function keyboard



DESCRIPTION:

Distance measurement :	40M,60M
Measuring precision:	±2mm
Unit:	m/in/ft
Measuring range:	0.03-40M~60M
Measure time:	0.1-3s
Screen line:	4 Line
Beep:	YES
Pythagoras:	Standard
Battery type:	2x AAA Alkaline
Battery life/times:	5000 times
Recall date:	20
Auto laser off:	15s
Auto power off:	45s
Backlight:	White LED
Key life:	100000 times
Unit dimensions:	40x25x120mm
Unit Weight:	85g



STANDARD PARTS:



LASER DISTANCE METER

M-40 (40M)
M-60 (60M)
M-80 (80M)
M-100 (100M)

New

- Area
- Volume
- Wall measure
- Min./Max.Function
- Angle measurement
- Pythagorean
- Addition/Subtraction
- 2 Datum Position
- Tripod available
- Fast Read of distance
- Record 20 groups of data
- With Tilt Sensor and Auto Level



DESCRIPTION:

Distance measurement:	40M,60M,80M,100M
Measuring precision:	±2mm
Unit:	m/in/ft
Measuring rang:	0.03-40M~100M
Measure time:	0.1-3s
Bluetooth:	Optional
Beep:	YES
Pythagoras:	PRO
Battery type:	2x AAA Alkaline
Battery life/times:	5000 times
Recall date:	20
Auto laser off:	60s
Auto power off:	8 minutes
Backlight:	White LED
Key life:	100000 times
Unit dimensions	125x55x30mm
Unit Weight:	120g



STANDARD PARTS:



STANDARD RANGE FINDER

X-20 (20M)
X-30 (30M)
X-40 (40M)
X-50 (50M)



- Area
- Volume
- Pythagorean
- 2 Datum Position
- Fast Read of distance
- Soft function keyboard



DESCRIPTION:

Distance measurement:	20M, 30M, 40M, 50M
Measuring precision:	±2mm
Unit:	m/in/ft
Measuring range:	0.03-50M
Measure time:	0.1-3s
Ingress protection:	IP54
Beep:	YES
Pythagoras:	Standard
Battery type:	2x AAA Alkaline
Battery life/times:	5000 times
Recall date:	20
Auto laser off:	60s
Auto power off:	8minutes
Backlight:	White LED
Key life:	100000 times
Unit dimensions:	115x40x20mm
Unit Weight:	105g



STANDARD PARTS:



LASER DISTANCE METER

D-40 (40M)
D-60 (60M)
D-80 (80M)
D-100 (100M)

Pro



- Area
- Volume
- Wall measure
- Min./Max.Function
- Angle measurement
- Pythagorean
- Addition/Subtraction
- 2 Datum Position
- Tripod available
- Fast Read of distance
- Record 20 groups of data



DESCRIPTION:

Distance measurement:	40M, 60M, 80M, 100M
Measuring precision:	±2mm
Unit:	m/in/ft
Measuring range:	0.03-40M~100M
Measure time:	0.1-3s
Ingress protection:	IP54
Beep:	YES
Pythagoras:	PRO
Battery type:	2x AAA Alkaline
Battery life/times:	5000 times
Recall date:	20
Auto laser off:	60s
Auto power off:	8 minutes
Backlight:	White LED
Key life:	100000 times
Unit dimensions:	125x55x30mm
Unit Weight:	120g



STANDARD PARTS:




LASER DISTANCE METER

W-40 (40M)

New

- Area
- Volume
- Pythagorean
- USB recharge
- 2 Datum Position
- Fast Read of distance
- Soft function keyboard



DESCRIPTION:

Distance measurement :	40M
Measuring precision:	±2mm
Unit:	m/in/ft
Measuring range:	0.03-40M~60M
Measure time:	0.1-3s
Screen line:	4 Line
Beep:	YES
Pythagoras:	Standard
Battery type:	2x AAA Alkaline
Battery life/times:	5000 times
Recall date:	20
Auto laser off:	15s
Auto power off:	45s
Backlight:	White LED
Key life:	100000 times
Unit dimensions:	30x15x92mm
Unit Weight:	31g



STANDARD PARTS:




USB recharge

LASER DISTANCE METER

H-40-S
H-60-S
H-80-S
H-100-S

Pro

- Area
- Volume
- Wall measure
- Min./Max.Function
- Angle measurement
- Pythagorean
- Addition/Subtraction
- 2 Datum Position
- Voice prompt
- USB recharge
- Fast Read of distance
- Record 20 groups of data



DESCRIPTION:

Distance measurement:	40M,60M,80M,100M
Measuring precision:	±2mm
Unit:	m/in/ft
Measuring rang:	0.03-40M~100M
Measure time:	0.1-3s
Ingress protection:	IP54
Beep:	YES
Pythagoras:	PRO
Battery type:	2x AAA Alkaline
Battery life/times:	5000 times
Recall date:	20
Auto laser off:	60s
Auto power off:	8 minutes
Backlight:	White LED
Key life:	100000 times
Unit dimensions	125x55x30mm
Unit Weight:	120g



STANDARD PARTS:




Bag Sling USB recharge Battery

SQUARE LASER LEVEL

ZY-DX02



- Square laser line
- Electronic touch switch
- Magnetic frame can hang on wall
- Two bubble design



DESCRIPTION:

Beam	90°square
Laser diode	650nm/3mw
Anti-dust&Anti-water	IP-54
Laser safety class	Class II
Accuracy	±1.5mm/5m
Self-leveling range	±3°
Working range	15m(with detector)
Power supply	3xAA alkaline batteries
Magnetic frame	Yes
Range of operating temperature	-10°C~+40°C
Instrumeng size	180X180X57mm
Intrumeng weight	0.25Kg
Standard accessory	Alkaline battery, Frame
Meas	49x23x27cm/10pcs



STANDARD PARTS:



AUTOMATIC CROSS LEVEL

ZY-SA02L



- Magnetic Frame
- "F" Clip with steel board
- Self-leveling cross line
- Low Voltage Lamp
- Tripod available



DESCRIPTION:

Beam	1V1H
Laser diode	635nm/5mw
Anti-dust&Anti-water	IP-20
Laser safety class	Class II
Accuracy	±1.5mm/5m
Self-leveling range	±3°
Working range	15m(with detector)
Power supply	3xAA alkaline batteries/rechargeable batteries
Mounting thread	1/4X20,UNC standard
Range of operating temperature	-10°C~+40°C
Instrumeng size	116X68X115mm
Intrumeng weight	0.80Kg
Standard accessory	Cloth bag,Laser glass,Alkaline battery
Meas	52x37.5x21cm/10pcs



STANDARD PARTS:



CROSS LASER LEVEL

SA-02CR(Red line) SA-02CG (Green line)



- ▶ Quality product, handy and easy to use
- ▶ One person does the job of two people using manual plumb bob
- ▶ TPE cover for drop proof protection
- ▶ Connect with 1/4" tripod, L frame and clip frame



DESCRIPTION:

Beam	1V1H Red or Green
Laser diode	635/3mw, 505nm/ 9.5mw
Laser Class	Class II
Accuracy	±1mm/5M
Expanded Angle	V110°, H100°
Self-leveling Range	4°±1°
Working Distance	15m/30m
Battery Type	LR6-AM3 2*AA 1.5V
Battery Life	12h/8h
Tripod Hole Size	1/4"
Working Temperature	-10°C to 40°C
Product Size	71.5x55x76.5mm
Product weight	225g
Meas	54x41x23cm/50pcs



STANDARD PARTS:




cloth box

battery

CROSS LASER LEVEL SET

SA-02CR(Red line) SA-02CG (Green line)



- ▶ Quality product, handy and easy to use
- ▶ One person does the job of two people using manual plumb bob
- ▶ TPE cover for drop proof protection
- ▶ Connect with 1/4" tripod, L frame and clip frame




DESCRIPTION:

Beam	1V1H Red or Green
Laser diode	635/3mw, 505nm/ 9.5mw
Laser Class	Class II
Accuracy	±1mm/5M
Expanded Angle	V110°, H100°
Self-leveling Range	4°±1°
Working Distance	15m/30m
Battery Type	LR6-AM3 2*AA 1.5V
Battery Life	12h/8h
Tripod Hole Size	1/4"
Working Temperature	-10°C to 40°C
Product Size	71.5x55x76.5mm
Product weight	225g
Meas	54x41x23cm/50pcs



STANDARD PARTS:



BNC box

L Frame

1/4" Thread

Tripod (1.2M)

Battery

AUTOMATIC CROSS LEVEL

ZY-SA02
1H 1V 1D



ZY-SA03
1H 2V 1D



ZY-SA05
1H 4V 1D



- Self-leveling cross line
- Electronic touch switch
- 360° adjustment
- Tripod available
- Have CE GS Certificate



DESCRIPTION:

Beam	ZY-SA02 1H1V1D	ZY-SA03 1H2V1D	ZY-SA05 1H4V1D
Laser diode	635nm/5mw		
Anti-dust&Anti-water	IP-20		
Laser safety class	Class II		
Accuracy	±1.5mm/5m		
Self-leveling range	±3°		
Working range	15m(with detector)		
Power supply	3xAA alkaline batteries/rechargeable batteries		
Mounting thread	5/8"X11,UNC standard		
Range of operating temperature	-10°C~+40°C		
Intrument size	φ136X186mm		
Intrument weight	1Kg		
Standard accessory	Plastic case, Laser glass, Alkaline battery		
Meas	50x46.5x27cm/6pcs		



STANDARD PARTS:



GREEN CROSS LASER LEVEL

SA-02G



SA-03G



SA-05G



- Green Beam laser line
- Automatic cross line
- Connect with 1/4" tripod.
- 2000mA Li-ion Battery



DESCRIPTION:

Beam	SA-02G SA-03G SA-05G
Laser diode	635nm/5mw
Anti-dust&Anti-water	IP-20
Laser safety class	Class II
Accuracy	±1.5mm/5m
Self-leveling range	±3°
Working range	15m(with detector)
Power supply	2000mA Li-ion Battery or adapter
Mounting thread	5/8X11,UNC standard
Range of operating temperature	-10°C~+40°C
Intrument size	110X120X190mm
Intrument weight	0.91Kg
Standard accessory	Box, USB cable, Charger, Glasses, Battery
Meas	52x37.5x21cm/4pcs



STANDARD PARTS:



3D 12 LINE CROSS LASER LEVEL

MK-3D03



- ▶ 360° adjust for laser level.
- ▶ Green beam laser technology
- ▶ 7mm close-up the wall
- ▶ Connect with 1/4" tripod.
- ▶ 7500mA Li-ion Battery for long work time



DESCRIPTION:

Beam	12 Line
Laser diode	635nm/5mw
Anti-dust&Anti-water	IP-20
Laser safety class	Class II
Accuracy	±1.5mm/5m
Self-leveling range	±3°
Working range	15m(with detector)
Power supply	7500mA Li-ion Battery or adapter
Mounting thread	5/8X11,UNC standard
Range of operating temperature	-10°C~+40°C
Instrumnet size	143x83x130mm
Instrumeng weight	1.07KG
Standard accessory	Tool box, Charger, Li-ion battery(7500A)
Meas	52x42x35cm/4pcs



STANDARD PARTS:



Tool box Charger Li-ion Battery

LASER PRODUCT ACCESSORY

Tripod



TP-1.2S 1/4"
TP-1.5S 1/4"
TP-1.8S 1/4"
TP-1.2 5/8"
TP-1.5 5/8"
TP-1.8 5/8"

L frame with magnet



LP-L01 1/4" LP-L02 1/4"

Adaptor :5/8" to 1/4"



LP-A01 5/8" to 1/4" LP-A02 5/8" to 1/4"

Clip



LP-C LP-F metal for magnet

Telescoping pole



LP-2.8 LP-4.0